

ODM 600-TW-C/14


Fourteen Head Combination Weighing System
Vertical Packaging Machines

Öndört Kefeli Elektronik Terazili Dikey Paketleme Makinası
ODM 600 Vertical Packaging Machine makes Stand up bag, quadro bag and Pillow bag types.
The max. weight to pack is 5000 gr. The Max pack sizes are 300*500 mm It's manufacturing as either servo or pneumatic according to the demanded capacity.
Suitable for products like, Cereals, nuts, dry fruits, chocolate, candy, chips, cookies, pasta, fruit, vegetables, frozen meat, coffee, tea etc.

ODM 600 Dikey paketleme makinası Yastık, Oturan ve quadro paket yapabilmektedir.
Max. 5000 gr paketleme yapabilmektedir. Max paket ebadı 300*500 mm dir. İstenilen üretim kapasitesine bağlı olarak pnömatrik veya servo kontrollü olarak üretilmektedir.
Serbest akıcılığı olan taneli-granül haldeki mamüllerin tam otomatik olarak paketlenmesinde kullanılmaktadır. Genellikle çikolata, şekerleme, bisküvi, cips, kraker, makarna bakliyat ürünleri ve taneli baharat ürünlerinin ambalajlanmasında kullanılır.

Accessories

- Feeding Elevator
- Output Conveyor
- Printer
- Folding Unit for Standup bag
- Quadro bag System
- Metal Detector
- Checkweigher
- Dust Sucking System
- Gas Flushing System
- Anti-static bar
- Euro hole device
- Round hole Device
- Inserter cards system
- Labeling System

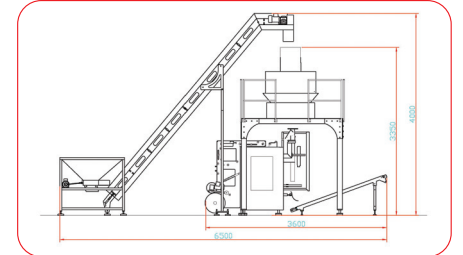

Technical Details Teknik Detay	ODM 600-TW-C/10	ODM 600SM-TW-C/14
Filling System / Dolum Sistemi	Ten / Fourteen Electronic weighing system / On veya öndört kefeli elektronik terazili	
Suitable for / Paketlenebilen ürünler	Cereals, nuts, dry fruits, chocolate, candy, chips, cookies, pasta, fruit, vegetables, frozen meat, coffee, tea etc. Kuruyemiş, şekerleme, bisküvi, çikolata, cipsler, kraker, jelly, makarnalar vb. ürünler.	
Filling Range / Gramaj Aralığı	500- 5000 gr	
Shape of the Bag / Paket Tipleri	Pillow bag, Stand up bag, Quadro Bag / Yastık paket, Oturan paket, Quadro paket	
Packaging Speed / Paketleme Hızı	20-50 ppm / 20-50 pak/dakika	40-80 ppm / 40-80 pak/dakika
Type of Packaging Material / Ambalaj Malzemesi Cinsi	OPP, CPP, Pet, Alu, Metalize and other laminated films / Opp, Cpp, Pet, Alu, Metalize vb. laminasyonlu malzemeler	
Min. Dimensions of the Bag / Min. Paket Eni ve Boyu	100 x 150 mm	100 x 150 mm
Max. Dimensions of the Bag / Max. Paket Eni ve Boyu	300 x 500 mm	300 x 500 mm
Max. Width of the Film / Max. Bobin Eni	700 mm	700 mm
Inner Diameter of the Core / Bobin Makarasi İç Çapı	76 mm	76 mm
Max. Diameter of the Roll / Max. Bobin Çapı	500 mm	500 mm
Dimensions of the Machine / Makine Ebatları	2000 x 2200 x 3700 mm	2000 x 2200 x 4000 mm
Weight of the Machine / Makine Ağırlığı	1.600-kg	1.800-kg
Mechanic Structure / Mekanik Kontrol Sistemi	Pneumatic / Pnömatik	By servo / İki eksen servo kontrollü
Pneumatic Systems / Pnömatik Sistem	Festo	Festo
Control System / Elektrik Sistemi	SIEMENS / OMRON	SIEMENS / OMRON
Electricity Supply & Consumption / Elektrik Beslemesi ve Tüketimi	380 Volt AC / 6 Kwh	380 Volt AC / 7 Kwh
Air Supply & Consumption / Hava Beslemesi ve Tüketimi	6 bar / 300 Lt / min.	6 bar / 100 Lt / min